

PARQET


THE PURES

Sleek and virtually knot-free oak parquet


- 3 mm oak top layer
- Sleek and virtually knot-free oak parquet
- Small, healthy knots up to +/- 10 mm and tannin streaks are occasionally permitted
- 99% sapwood-free
- Fairly uniform in color
- UV lacquer finish

14 x 220


	14 mm	
	3 mm	
	220 X 600-2200 mm	



DERBY
PUR 019 220




CARDIFF
PUR 020 220




WINCHESTER
PUR 021 220

14 x 190


	14 mm	
	3 mm	
	190 X 600-1900 mm	




LONDON
PUR 019




LIVERPOOL
PUR 020




MANCHESTER
PUR 021



COVENTRY
PUR 023




NEWCASTLE
PUR 025




LEEDS
PUR 022

10 x 152


	10 mm	
	3 mm	
	152 X 600-1900 mm	



CHESTER
10 PUR 019 150




SHEFFIELD
10 PUR 020 150




SUNDERLAND
10 PUR 021 150

14x120HB


	14 mm	
	3 mm	
	120 X 600mm	



YORK
PUR 019 HB



CAMBRIDGE
PUR 020 HB




OXFORD
PUR 021 HB

THE PURES

Sleek and virtually knot-free oak parquet

WOOD DESCRIPTION

WOOD TYPE	Oak Quercus Rubra
SELECTION	AB(C), limited number of "C" planks admitted
KNOTS	Small, healthy knots up to +/- 10 mm and tannin streaks are occasionally permitted
SAPWOOD	99% sapwood-free
COLOR	Fairly uniform in color
EXTRA INFO	End cracks, insect damage, ingrown bark, and mechanical defects are excluded

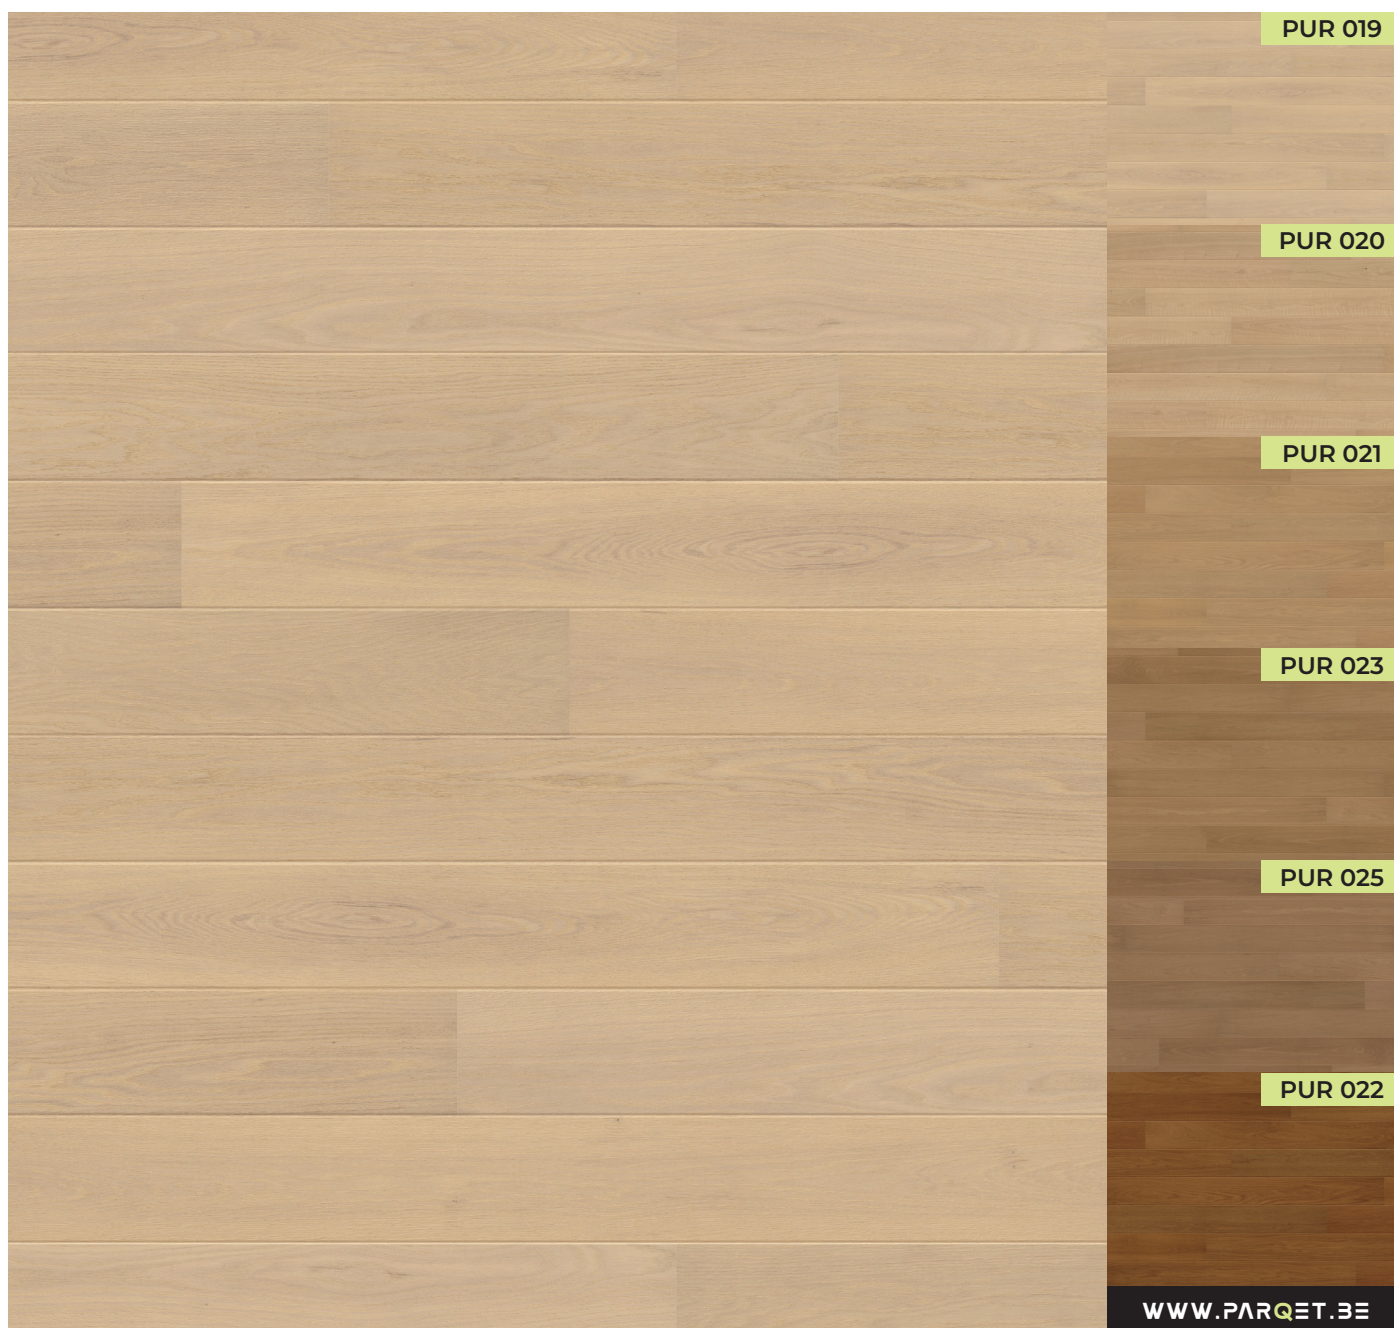

DESCRIPTION

Sleek and virtually knot-free oak parquet.
Small, healthy knots up to +/- 10 mm and tannin streaks are occasionally permitted & 99% sapwood-free.
Fairly uniform in color.
End cracks, insect damage, ingrown bark, and mechanical defects are excluded.

TECHNICAL DATA

WOOD TYPE	Oak Quercus Rubria	
FINISH/ DOP	UV lacquer PUR 019 • PUR 020 • PUR 021 • PUR 022 • PUR 023 • PUR 025	
BEVEL EDGE	GO2 • 14x220 & 14x190 & 10x152 GO4 • 14x120 HB	
TEXTURE	Brushed	
TOP LAYER	3 mm (±0,5 mm)	
CONSTRUCTION	Plank 14 mm • 3-layer poplar Plank 10 mm • multi-layer eucalyptus	
INSTALLATION	T&G - full bonding recommended - floating installation possible	
DIMENSIONS	PLANK • 14 x 220 x 600-2200 mm • 14 x 190 x 600-1900 mm • 10 x 152 x 600-1900 mm	HERRINGBONE • 14 x 120 x 600 mm
PACKAGING	BOX • 14 x 220: 6 layers of which 75% full lengths, max. 25% cut lengths (min. 600 mm) • 14 x 190: 8 layers of which 75% full lengths, max. 25% cut lengths (min. 600 mm) • 10 x 152: 10 layers of which 75% full lengths, max. 25% cut lengths (min. 600 mm) • 14 x 120: 16 full lengths (8 right + 8 left) WEIGHT • 14 x 220 • ± 7,42 kg/m² • ± 22,55 kg/box • 14 x 190 • ± 7,42 kg/m² • ± 22,43 kg/box • 10 x 152 • ± 6,70 kg/m² • ± 20,67 kg/box • 14 x 120 • ± 7,42 kg/m² • ± 9,81 kg/box	
CONTAINER	• 14 x 220: 26460 kg/container • 1155 box/container • 21 pallets/container • 14 x 190: 22008 kg/container • 960 box/container • 24 pallets/container • 10 x 152: 26784 kg/container • 1296 box/container • 24 pallets/container • 14 x 120: 25120 kg/container • 2560 box/container • 40 pallets/container	
GLOSS LEVEL	5-7%	
STANDARD	European standard EN 14342 : 2013	
MASS DENSITY	600 kg/m ³	
FIRE RESISTANCE	Cfl-S1	
FORMALDEHYDE EMISSION	E1	
PCP	≤ 0.05ppm	
THERMAL CONDUCTIVITY	0.12W/mK	
DURABILITY CLASS	Class 2	
HUMIDITY DEGREE	6 à 8 % (± 2%)	
FLOOR HEATING	Allowed, subject to compliance with applicable regulations	
MAINTENANCE	See maintenance sheet	

© This technical data sheet was prepared by Floorme.

All information, photos, drawings, tables, and graphs in this sheet are intended to support the product information of Floorme and may only be used in connection with the sale, installation, or specification of Floorme products.

Floorme reserves the right to make changes to the technical data, specifications, images, and product designs at any time and without prior notice.

The photos and illustrations shown, including the displayed wood selections, are for illustrative purposes only and may differ from the delivered product. No rights can be derived from this data sheet.