






- 3 mm oak top layer
- Subtly aged oak parquet
- Healthy knots up to +/- 50 mm, dead knots up to +/- 40 mm
- Filled and open (end) cracks with a maximum width of +/- 12 mm
- Slightly retouched sapwood up to +/- 10 mm
- Natural color variations
- UV lacquer finish




14 x 220		
	14 mm	
	3 mm	
	220 X 600-2200 mm	




MARSEILLE
VIN 070



NANTES
VIN 071




TOULOUSE
VIN 073



TROYES
VIN 075

WOOD DESCRIPTION

WOOD TYPE	Oak Quercus Robur, aged and brushed
SELECTION	CDE rustic, limited number of "E" planks allowed
KNOTS	Healthy knots up to +/- 50 mm, dead knots up to +/- 40 mm Filled and open (end) cracks with a maximum width of +/- 12 mm
SAPWOOD	Limited colored sapwood up to 10 mm
COLOR	Natural color variations
EXTRA INFO	Insect damage and mechanical defects are excluded

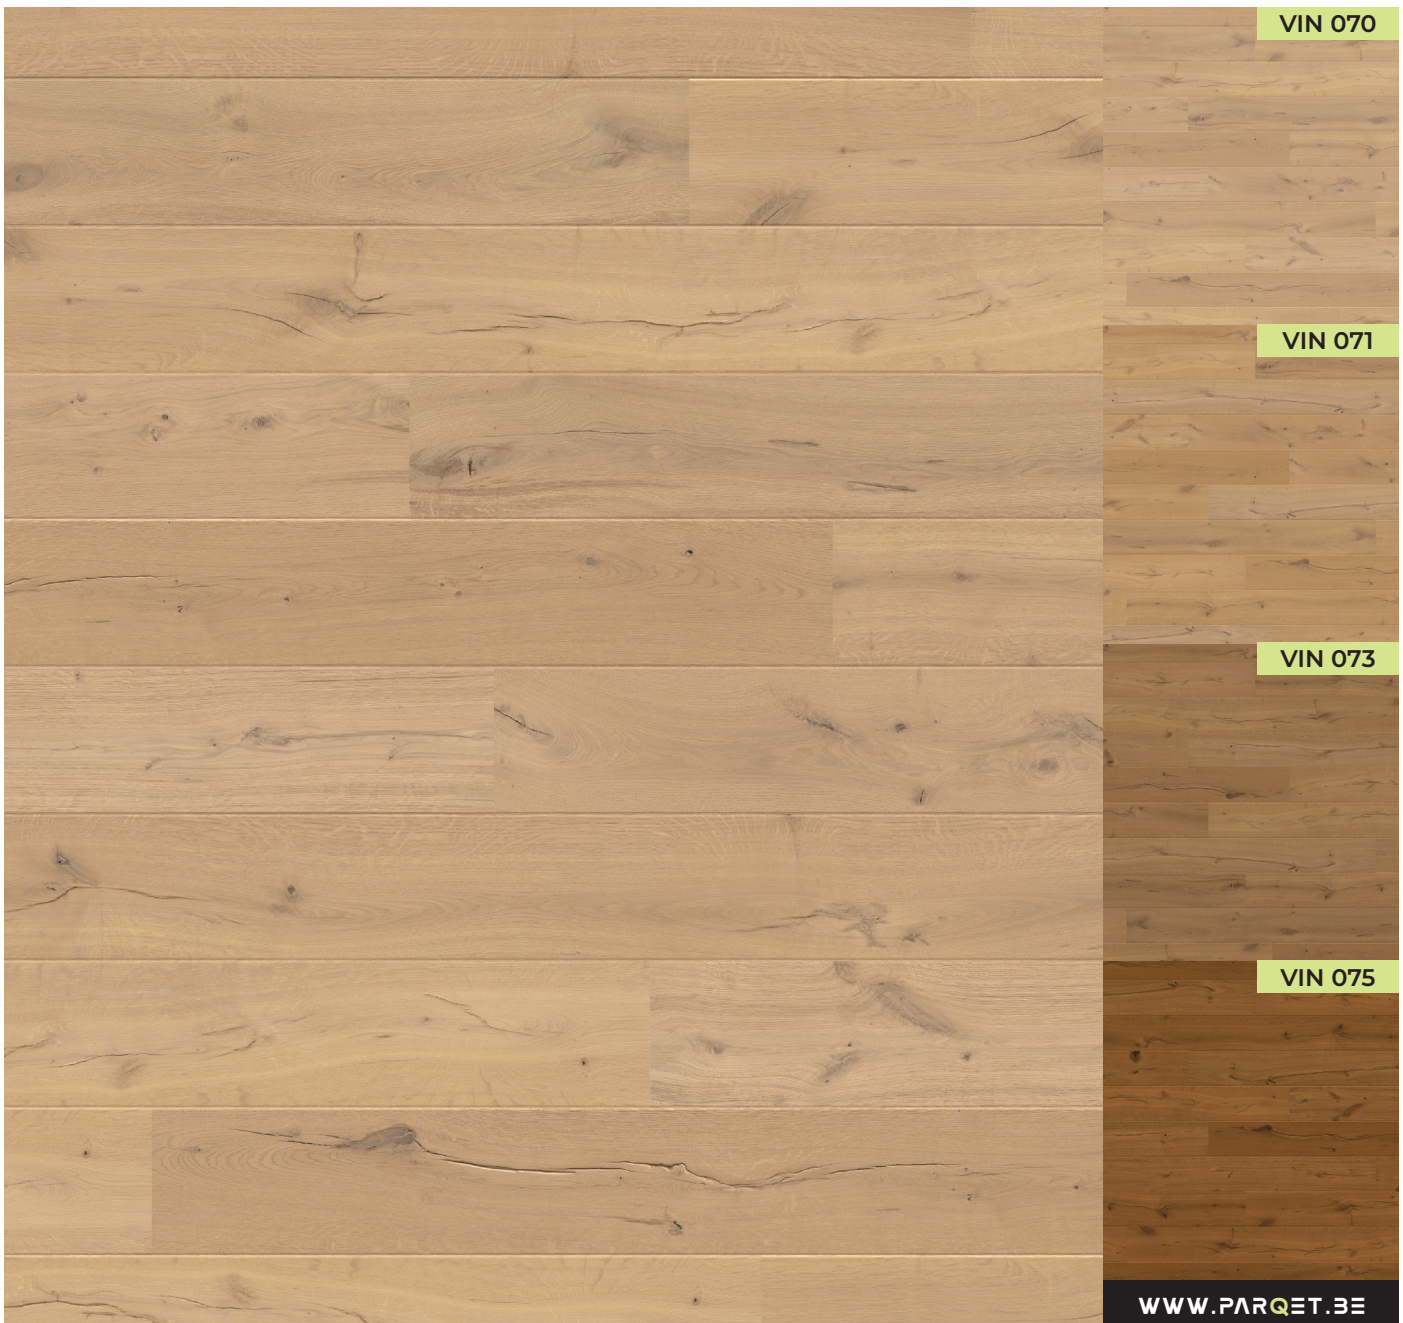

VIN 070

VIN 071

VIN 073

VIN 075

DESCRIPTION

Subtly aged oak parquet.
Healthy knots up to +/- 50 mm, dead knots up to +/- 40 mm.
Filled and open (end) cracks with a maximum width of +/- 12 mm.
Slightly retouched sapwood up to +/- 10 mm.
Natural color variations.
Insect damage and mechanical defects are excluded.

TECHNICAL DATA

WOOD TYPE	Oak Quercus Robur
FINISH/ DOP	UV lacquer VIN 070 • VIN 071 • VIN 073 • VIN 075
BEVEL EDGE	GO2
TEXTURE	Brushed
TOP LAYER	3 mm (±0,5 mm)
CONSTRUCTION	3-layer poplar
INSTALLATION	T&G - full bonding recommended - floating installation possible
DIMENSIONS	PLANK • 14 x 220 x 600-2200 mm
PACKAGING	BOX • 14 x 220: 6 layers of which 75% full lengths, max. 25% cut lengths (min. 600 mm) WEIGHT • 14 x 220 - ± 7,42 kg/m ² • ± 22,55 kg/box
CONTAINER	• 14 x 220: 26460 kg/container • 1155 box/container • 21 pallets/container
GLOSS LEVEL	5-7%
STANDARD	European standard EN 14342 : 2013
FIRE RESISTANCE	Cfl-S1
FORMALDEHYDE EMISSION	E1
PCP	≤ 0.05ppm
THERMAL CONDUCTIVITY	0.12W/mK
DURABILITY CLASS	Class 2
HUMIDITY DEGREE	9% (± 2%)
FLOOR HEATING	Allowed, subject to compliance with applicable regulations
MAINTENANCE	See maintenance sheet

© This technical data sheet was prepared by Floorme.

All information, photos, drawings, tables, and graphs in this sheet are intended to support the product information of Floorme and may only be used in connection with the sale, installation, or specification of Floorme products.

Floorme reserves the right to make changes to the technical data, specifications, images, and product designs at any time and without prior notice.

The photos and illustrations shown, including the displayed wood selections, are for illustrative purposes only and may differ from the delivered product. No rights can be derived from this data sheet.